



LITHIUM BATTERY

Primary lithium batteries ER34615

3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Energy type
D-size bobbin cell


For high drain/high pulses applications requesting superior voltage response in -55°C ~+85°C environments.

Cell size references (UM1 - R20 - D)

Alternative models	LS33600/LS33600C/LS33600LM/TL4930/SB-D01/SB-D02
Electrical characteristics (typical values relative to cells stored for one year or less at +30°C max.)	
Nominal capacity (at 3 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	19Ah
Open circuit voltage (at +20°C)	3.66V
Nominal voltage (at 3mA +20°C)	3.6V
Pulse capability: Typically up to 400 mA (400 mA/0.1 second pulses drained every 2 mn at +20°C from undischarged cells with 10µ A base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell ' s previous history. Fitting the cell with a capacitor may be recommended in severe conditions.)	
Max. Continuous current	200mA
Max. Pulse current	400mA
Storage (recommended) (for more severe conditions)	+30°C max
Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses)	-55°C / +85°C
Physical characteristics	
Diameter (max)	34mm(1.41 in)
Height (max)	61.5mm(2.44 in)
Typical weight	106g(3.47 oz)
Available termination suffix	radial tabs, radial pins, axial leads, flying leads

LITHIUM BATTERY

ER34615

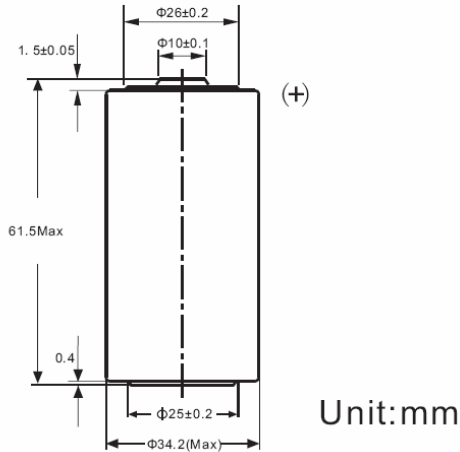

Key features

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (less than 1% after 1year of storage at +20℃)
- ▶ Optional stainless steel container for low magnetic and nickle plated steel container for more safe design
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent is recommended
- ▶ Non-flammable electrolyte

Main applications

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others

Storage

- ▶ The storage area should be clean, cool (not exceeding +30℃), dry and ventilated.

Warning

- ▶ Do not use if the battery casing was mangled.
- ▶ Please discharge the battery few minutes with 100mA, if the battery voltage is lower than your need or consult Tenergy.
- ▶ Don't use different models of battery in series.
- ▶ Soldering the tag should be finished in few seconds.
- ▶ Do not try to recharge.

Characteristic curves

